
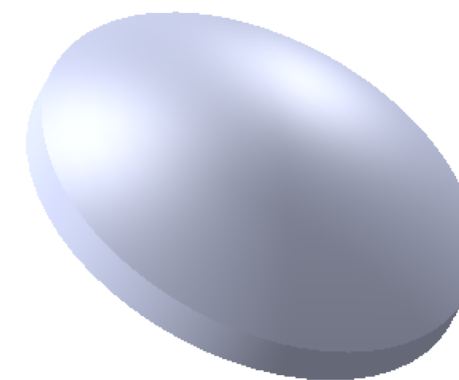
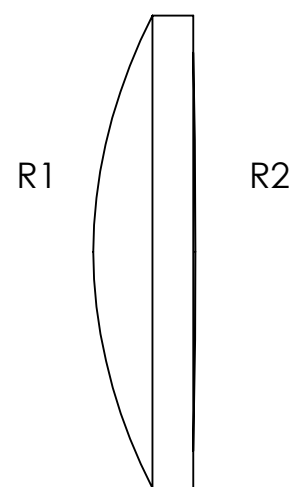


	Base Radius	CX	CC	Irregularity (fringes)	Clear Aperture (mm)	Surface Quality (typical)	Centration (arcmin)
R1	12.760	X		1.0	11.0	40/20	3
R2	244.48	X		1.0	9.7	40/20	

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	Update	8/21/2019	DF

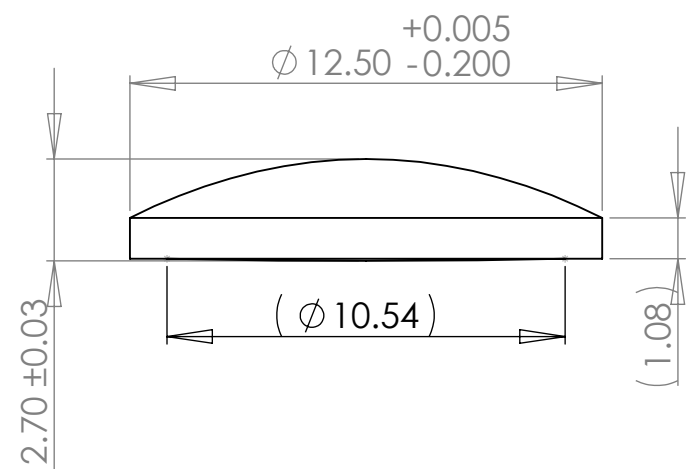

Notes:

- 1) Material: L-BAL35M
- 2) Edge Chamfer: 0.1-0.3mm
- 3) AR Coating: <0.5% reflectivity from 400-650nm ("A" coat) or 620-1080nm ("B" coat), per surface.
- 4) All dimension in mm unless noted

1208 Sigma Ct  
 Rockwall, TX 75087  
 Ph: (972) 722-1064  
 Web: www.archeroptx.com



**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ARCHER OPTX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ARCHER OPTX, INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE:  <b>Bi-Convex Lens</b>
DIMENSIONS ARE IN MM TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN		
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		
MATERIAL		ENG APPR.		
FINISH		MFG APPR.		
NEXT ASSY	USED ON	Q.A.		SIZE <b>B</b> DWG. NO. <b>P1221</b> REV <b>C</b>
APPLICATION		COMMENTS:		
DO NOT SCALE DRAWING		SCALE: 5:1 WEIGHT:		SHEET 1 OF 1